


## 26.16. Misc labels

This function allows you to create and save labels that you can print at any time from a label printer. Before you can print labels using this function, you must setup the printer must be set up and configured in mSupply - see the [25.18. Label printer hardware setup](#) and [10.08. Label printing preferences](#) sections of this user guide for information about this.

### The labels list

To open this list, choose the *Special > Misc labels* menu item. This window will open displaying a list of all the currently saved labels:

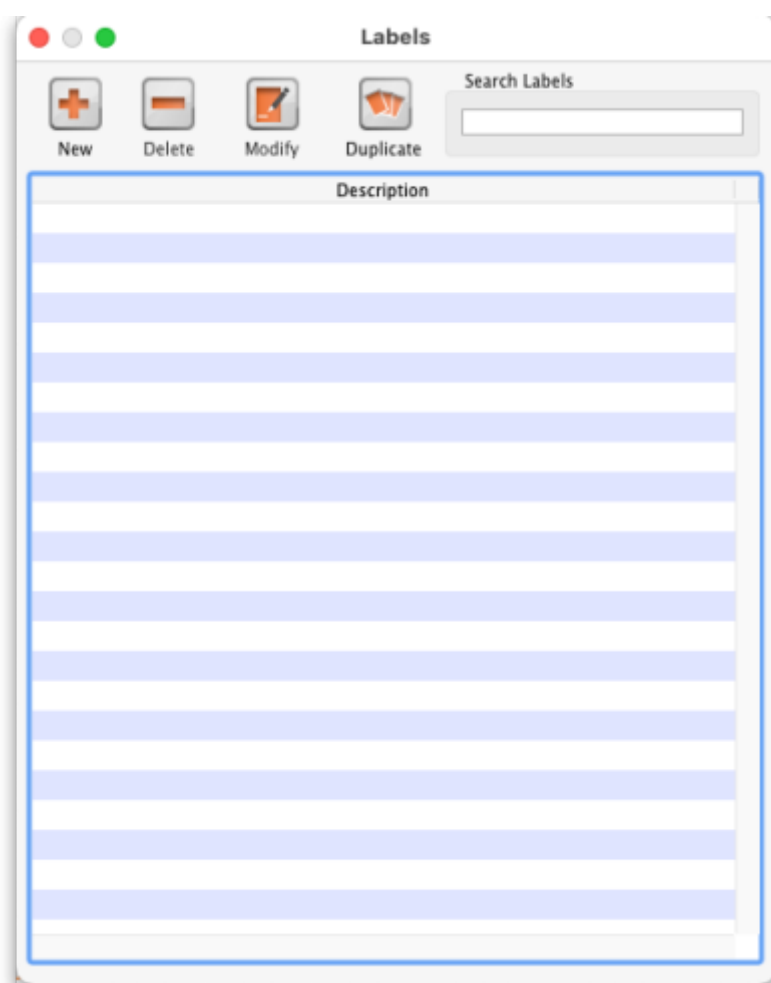

Double-click a label in the list to edit/print that label. Click the New button to add a new label.

The window for editing or adding a label look the same, the only difference is that the existing label will be populated with the current settings saved for that label.



The labels are designed to print to plain 90mm x 40mm (w x h) labels from a Zebra label printer. Please contact us if you require support of other printers and other label formats.

The screenshot shows the 'Add label' dialog box. It has two tabs: 'Normal' (selected) and 'Multiple'. The 'Label name' field contains 'Tab Aspirin 300mg'. Under 'Label details', the 'Heading' field contains 'Tab Aspirin 300mg' and the 'Body' field is empty. The 'Left footers' and 'Right footers' fields are empty, with '2/2/2013' entered in the right footer field. The 'Centred Footer' field contains 'Hospital pharmacy'. The 'Size' settings for heading, body, and footers are all set to 10. The 'Line spacing' is 1 mm. The 'Quantity to print' is 1. The 'Print', 'Cancel', and 'OK' buttons are at the bottom.

## Normal tab

This is for normal layout of printing. This will occur once per label. You can use the **quantity to print** field to specify how many time to print this same label.

### Label name

This field will not print on the label, this name is shown in the list of available labels when the *Special > Misc labels* menu item is chosen.

### Label details

These fields will print on the label in roughly the position that they are on the screen.

Note that if you enter a very long left and right footer they may overlap in the middle of the label. Print a single test label to check first.

### Line spacing

The spacing you want between each line of text.

### Size

The font size you wish to use for each part of the label.

### Quantity to print

Specify how many copies of this label you wish to print.

Note that the quantity to print is not saved - it is reset to 1 each time you open the label.

### Print button


Clicking this button will print to your default mSupply label printer. It will print then number of labels specified in the *Quantity to print* field.

**Cancel button**

Clicking Cancel will close the window without saving any changes you have made.

**OK Button**

Clicking OK will save any changes you have made and close the window.

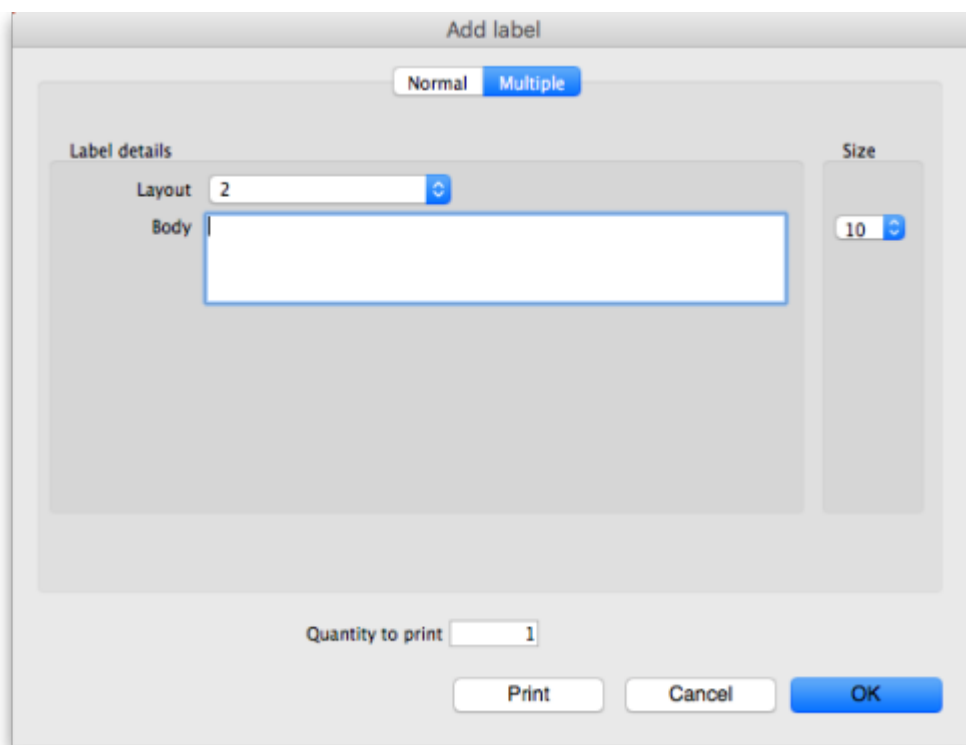**Multiple tab**

This allows you to print the same thing multiple times on the same label.

**Layout:**

Select "2" for the same thing printed twice on the label, side by side.

Select "4" for the same thing to be printed 4 times on the label in a 2x2 grid layout.

**Body**

The text you want printed on the label. This label will have no headers and footers.

Previous: **[26.15. Remote authorisation](#)** | | Next: **[26.17. Keyboard shortcuts](#)**

From:

<https://docs.msupply.org.nz/> - mSupply documentation wiki

Permanent link:

**[https://docs.msupply.org.nz/other\\_stuff:misc\\_labels?rev=1680620280](https://docs.msupply.org.nz/other_stuff:misc_labels?rev=1680620280)**

Last update: **2023/04/04 14:58**

